

1478-93

(7435-83)

1478-93

1

, -

2

21 1993 .

,

:

3

2 1994 . 160

, 1478—93

1 1995 .

4

1478-84

5

, -

1478-93

Dog-point straight slotted set screws.
Product grades A and B. Specifications

(7435-83)

МКС 21.060.10
16 5000


1995—01—01

d 1,6 12

1

1.1

1.

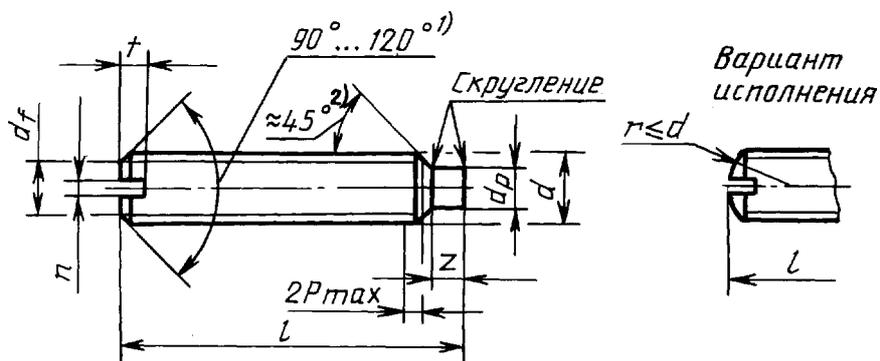

120°
1.
45°

1478-93

<i>d</i>					1,6	2	2,5	3	(3,5)	4	5	6	8	10	12	
					0,35	0,4	0,45	0,5	0,6	0,7	0,8	1	1,25	1,5	1,75	
<i>d_f</i>																
<i>d_P</i>					0,55	0,75	1,25	1,75	1,95	2,25	3,2	3,7	5,2	6,64	8,14	
					0,8	1	1,5	2	2,2	2,5	3,5	4	5,5	7	8,5	
					0,25	0,25	0,4	0,4	0,5	0,6	0,8	1	1,2	1,6	2	
					0,31	0,31	0,46	0,46	0,56	0,66	0,86	1,06	1,26	1,66	2,02	
					0,45	0,45	0,6	0,6	0,7	0,8	1	1,2	1,51	1,91	2,31	
<i>t</i>					0,56	0,64	0,72	0,8	0,96	1,12	1,28	1,6	2	2,4	2,8	
					0,74	0,84	0,95	1,05	1,21	1,42	1,63	2	2,5	3	3,6	
<i>z</i>					0,8	1	1,25	1,5	1,75	2	2,5	3	4	5	6	
					1,05	1,25	1,5	1,75	2	2,25	2,75	3,25	4,3	5,3	6,3	
/D																
-																
2	1,8	2,2	1,5	2,5												
2,5	2,3	2,7	2	3												
3	2,8	3,2	2,5	3,5												
4	3,76	4,24	3,4	4,6												
5	4,76	5,24	4,4	5,6												
6	5,76	6,24	5,4	6,6												
8	7,71	8,29	7,25	8,75												
10	9,71	10,29	9,25	10,75												
12	11,65	12,35	11,1	12,9												
(14)	13,65	14,35	13,1	14,9												
16	15,58	16,42	15,1	16,9												
(18)	17,58	18,42	17,1	18,9												
20	19,58	20,42	18,95	21,05												
(22)	21,58	22,42	20,95	23,05												
25	24,58	25,42	23,95	26,05												
(28)	27,58	28,42	27,95	29,05												
30	29,58	30,42	28,95	31,05												
35	34,0	35,5	33,75	36,25												
40	39,5	40,5	38,75	41,25												
45	44,5	45,5	43,75	46,25												
50	49,5	50,5	48,75	51,25												
55	54,4	55,6	53,5	56,5												
60	59,4	60,6	58,5	61,5												

^

1.2

2

2,

2

			-	
		16093, 24705		
	-	J4H, 22 33, 45	21—26	31—35
		25556	1759.0	
		1759.1		
		9.301, 9.303. - , , , , , , -		
		— 17769		
		1759.1 —		
		— 1759.2		
		25556	1759.0	1759.0
		1759.0, 18160		

3

$d = 10$, $6g$, $l = 25$, 14 , :

10— 6g 25.14 1478-93

, : , 45 , 40 \ ,

.MIQ—6g>z25.45ff. 40 . 05 1478-93

, 59— 1, :

A.MIO— 6g 25,32. 59-1 1478-93

()

3—

/,	1000 . , =, d,										
	1,6	2	2,5	3	(3,5)	4	5	6	8	10	12
2	0,008										
2,5	0,016										
3	0,024	0,036									
4	0,040	0,055	0,088								
5	0,055	0,073	0,118	0,170	0,200						
6	0,071	0,092	0,148	0,214	0,277	0,337					
8	0,103	0,129	0,208	0,303	0,347	0,492	0,754	0,989			
10		0,167	0,267	0,391	0,497	0,647	1,002	1,342	2,240		
12			0,387	0,479	0,647	0,802	1,249	1,695	2,877	4,250	
(14)				0,567	0,820	0,957	1,496	2,047	3,514	5,254	7,378
16				0,656	0,974	1,112	1,744	2,400	4,150	6,258	8,833
(18)					1,067	1,267	1,991	2,753	4,787	7,262	10,291
20					1,317	1,422	2,239	3,106	5,424	8,266	11,743
(22)						1,936	2,486	3,458	6,061	9,270	13,204
25							2,857	3,987	7,016	10,776	15,380
(28)								4,516	7,971	12,282	17,562
30								4,869	8,608	13,291	19,011
35								5,751	10,201	15,803	22,653
40									11,790	18,312	26,284
45										20,824	29,922
50										23,330	33,561
55											40,240
60											44,640

0,97 — ; 1,08 — : 0,356 — ;

-

9.301-86	2	16093-2004	2
9.303-84	2	17769-83	2
1759.0-87	2	18160-72	2
1759.1-82	2	24705-2004	2
1759.2-82	2	25556-82	2